


SrPdGa₃ Structure:

A3BC_oC20_63_ce_c_c-001

Cite this page as: H. Eckert, S. Divilov, A. Zettel, M. J. Mehl, D. Hicks, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 4*. In preparation.

<https://aflow.org/p/2P2W>

https://aflow.org/p/A3BC_oC20_63_ce_c_c-001

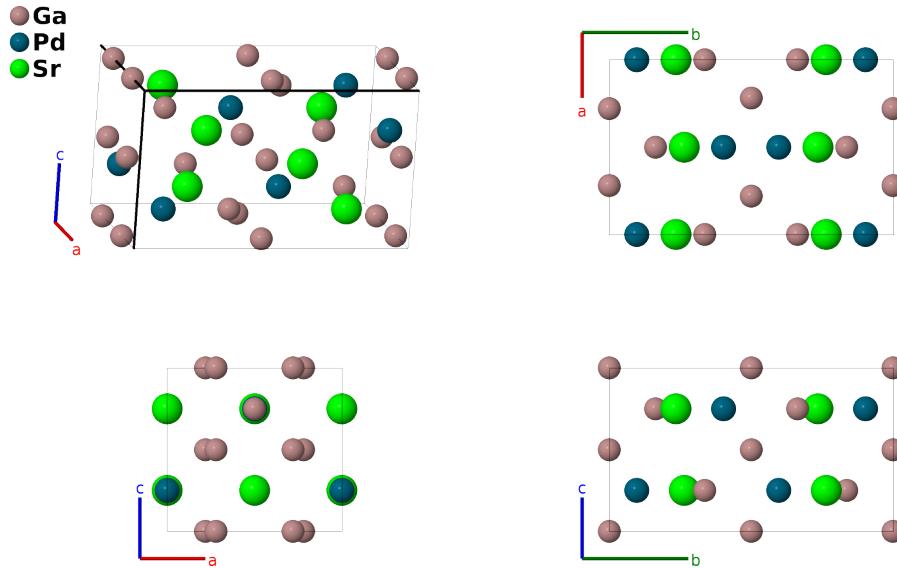

Prototype Ga₃PdSr

AFLOW prototype label A3BC_oC20_63_ce_c_c-001

ICSD 192026

Pearson symbol oC20

Space group number 63

Space group symbol *Cmcm*


AFLOW prototype command `aflow --proto=A3BC_oC20_63_ce_c_c-001
--params=a,b/a,c/a,y1,y2,y3,x4`

Other compounds with this structure

CeAgAl₃, CePdAl₃, CePdGa₃, EuPdGa₃, LaPdGa₃, NdPdGa₃, PrPdGa₃, SmPdGa₃, PbSbO₂Cl

Base-centered Orthorhombic primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= \frac{1}{2}a\hat{\mathbf{x}} - \frac{1}{2}b\hat{\mathbf{y}} \\ \mathbf{a}_2 &= \frac{1}{2}a\hat{\mathbf{x}} + \frac{1}{2}b\hat{\mathbf{y}} \\ \mathbf{a}_3 &= c\hat{\mathbf{z}}\end{aligned}$$

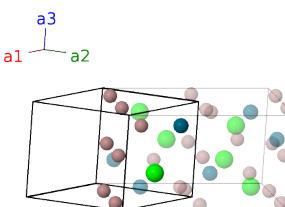

Basis vectors

	Lattice coordinates		Cartesian coordinates	Wyckoff position	Atom type
\mathbf{B}_1	$= -y_1 \mathbf{a}_1 + y_1 \mathbf{a}_2 + \frac{1}{4} \mathbf{a}_3$	$=$	$b y_1 \hat{\mathbf{y}} + \frac{1}{4} c \hat{\mathbf{z}}$	(4c)	Ga I
\mathbf{B}_2	$= y_1 \mathbf{a}_1 - y_1 \mathbf{a}_2 + \frac{3}{4} \mathbf{a}_3$	$=$	$-b y_1 \hat{\mathbf{y}} + \frac{3}{4} c \hat{\mathbf{z}}$	(4c)	Ga I
\mathbf{B}_3	$= -y_2 \mathbf{a}_1 + y_2 \mathbf{a}_2 + \frac{1}{4} \mathbf{a}_3$	$=$	$b y_2 \hat{\mathbf{y}} + \frac{1}{4} c \hat{\mathbf{z}}$	(4c)	Pd I
\mathbf{B}_4	$= y_2 \mathbf{a}_1 - y_2 \mathbf{a}_2 + \frac{3}{4} \mathbf{a}_3$	$=$	$-b y_2 \hat{\mathbf{y}} + \frac{3}{4} c \hat{\mathbf{z}}$	(4c)	Pd I
\mathbf{B}_5	$= -y_3 \mathbf{a}_1 + y_3 \mathbf{a}_2 + \frac{1}{4} \mathbf{a}_3$	$=$	$b y_3 \hat{\mathbf{y}} + \frac{1}{4} c \hat{\mathbf{z}}$	(4c)	Sr I
\mathbf{B}_6	$= y_3 \mathbf{a}_1 - y_3 \mathbf{a}_2 + \frac{3}{4} \mathbf{a}_3$	$=$	$-b y_3 \hat{\mathbf{y}} + \frac{3}{4} c \hat{\mathbf{z}}$	(4c)	Sr I
\mathbf{B}_7	$= x_4 \mathbf{a}_1 + x_4 \mathbf{a}_2$	$=$	$a x_4 \hat{\mathbf{x}}$	(8e)	Ga II
\mathbf{B}_8	$= -x_4 \mathbf{a}_1 - x_4 \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	$=$	$-a x_4 \hat{\mathbf{x}} + \frac{1}{2} c \hat{\mathbf{z}}$	(8e)	Ga II
\mathbf{B}_9	$= -x_4 \mathbf{a}_1 - x_4 \mathbf{a}_2$	$=$	$-a x_4 \hat{\mathbf{x}}$	(8e)	Ga II
\mathbf{B}_{10}	$= x_4 \mathbf{a}_1 + x_4 \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	$=$	$a x_4 \hat{\mathbf{x}} + \frac{1}{2} c \hat{\mathbf{z}}$	(8e)	Ga II

References

- [1] S. Seidel, R.-D. Hoffmann, and R. Pöttgen, *SrPdGa₃ - An orthorhombic superstructure of the ThCr₂Si₂ type*, Z. Krystallogr. **229**, 421–426 (2014), doi:10.1515/zkri-2014-1742.