


# VOSO<sub>4</sub> Structure: A5BC\_oP28\_62\_3cd\_c\_c-001

This structure originally had the label A5BC\_oP28\_62\_3cd\_c\_c. Calls to that address will be redirected here.

Cite this page as: D. Hicks, M. J. Mehl, M. Esters, C. Oses, O. Levy, G. L. W. Hart, C. Toher, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 3*, Comput. Mater. Sci. **199**, 110450 (2021), doi: 10.1016/j.commatsci.2021.110450.

<https://aflow.org/p/3N5K>

[https://aflow.org/p/A5BC\\_oP28\\_62\\_3cd\\_c\\_c-001](https://aflow.org/p/A5BC_oP28_62_3cd_c_c-001)

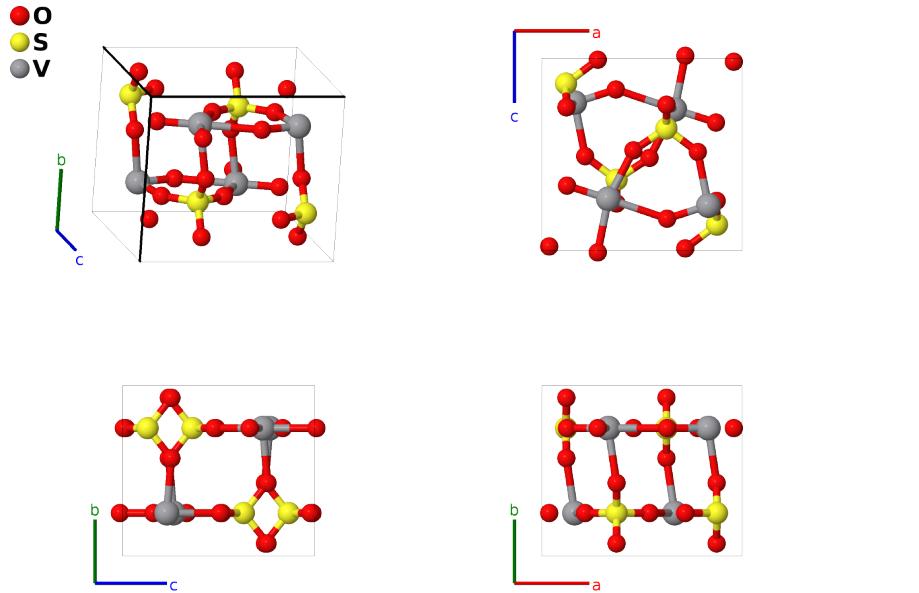


<b>Prototype</b>	O <sub>5</sub> SV
<b>AFLOW prototype label</b>	A5BC_oP28_62_3cd_c_c-001
<b>ICSD</b>	24101
<b>Pearson symbol</b>	oP28
<b>Space group number</b>	62
<b>Space group symbol</b>	<i>Pnma</i>
<b>AFLOW prototype command</b>	<code>aflow --proto=A5BC_oP28_62_3cd_c_c-001 --params=a,b/a,c/a,x1,z1,x2,z2,x3,z3,x4,z4,x5,z5,x6,y6,z6</code>

- This structure consists of distorted SO<sub>4</sub> tetrahedra linked to distorted VO<sub>6</sub> tetrahedra.

## Simple Orthorhombic primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= a \hat{\mathbf{x}} \\ \mathbf{a}_2 &= b \hat{\mathbf{y}} \\ \mathbf{a}_3 &= c \hat{\mathbf{z}}\end{aligned}$$

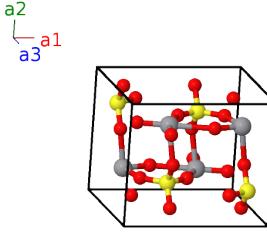

## Basis vectors

	Lattice coordinates	Cartesian coordinates	Wyckoff position	Atom type
$\mathbf{B}_1$	$x_1 \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 + z_1 \mathbf{a}_3$	$a x_1 \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} + c z_1 \hat{\mathbf{z}}$	(4c)	O I
$\mathbf{B}_2$	$-(x_1 - \frac{1}{2}) \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 + (z_1 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_1 - \frac{1}{2}) \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} + c(z_1 + \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O I
$\mathbf{B}_3$	$-x_1 \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 - z_1 \mathbf{a}_3$	$-a x_1 \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} - c z_1 \hat{\mathbf{z}}$	(4c)	O I
$\mathbf{B}_4$	$(x_1 + \frac{1}{2}) \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 - (z_1 - \frac{1}{2}) \mathbf{a}_3$	$a(x_1 + \frac{1}{2}) \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} - c(z_1 - \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O I
$\mathbf{B}_5$	$x_2 \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 + z_2 \mathbf{a}_3$	$a x_2 \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} + c z_2 \hat{\mathbf{z}}$	(4c)	O II
$\mathbf{B}_6$	$-(x_2 - \frac{1}{2}) \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 + (z_2 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_2 - \frac{1}{2}) \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} + c(z_2 + \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O II
$\mathbf{B}_7$	$-x_2 \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 - z_2 \mathbf{a}_3$	$-a x_2 \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} - c z_2 \hat{\mathbf{z}}$	(4c)	O II
$\mathbf{B}_8$	$(x_2 + \frac{1}{2}) \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 - (z_2 - \frac{1}{2}) \mathbf{a}_3$	$a(x_2 + \frac{1}{2}) \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} - c(z_2 - \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O II
$\mathbf{B}_9$	$x_3 \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 + z_3 \mathbf{a}_3$	$a x_3 \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} + c z_3 \hat{\mathbf{z}}$	(4c)	O III
$\mathbf{B}_{10}$	$-(x_3 - \frac{1}{2}) \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 + (z_3 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_3 - \frac{1}{2}) \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} + c(z_3 + \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O III
$\mathbf{B}_{11}$	$-x_3 \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 - z_3 \mathbf{a}_3$	$-a x_3 \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} - c z_3 \hat{\mathbf{z}}$	(4c)	O III
$\mathbf{B}_{12}$	$(x_3 + \frac{1}{2}) \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 - (z_3 - \frac{1}{2}) \mathbf{a}_3$	$a(x_3 + \frac{1}{2}) \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} - c(z_3 - \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	O III
$\mathbf{B}_{13}$	$x_4 \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 + z_4 \mathbf{a}_3$	$a x_4 \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} + c z_4 \hat{\mathbf{z}}$	(4c)	S I
$\mathbf{B}_{14}$	$-(x_4 - \frac{1}{2}) \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 + (z_4 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_4 - \frac{1}{2}) \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} + c(z_4 + \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	S I
$\mathbf{B}_{15}$	$-x_4 \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 - z_4 \mathbf{a}_3$	$-a x_4 \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} - c z_4 \hat{\mathbf{z}}$	(4c)	S I
$\mathbf{B}_{16}$	$(x_4 + \frac{1}{2}) \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 - (z_4 - \frac{1}{2}) \mathbf{a}_3$	$a(x_4 + \frac{1}{2}) \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} - c(z_4 - \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	S I
$\mathbf{B}_{17}$	$x_5 \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 + z_5 \mathbf{a}_3$	$a x_5 \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} + c z_5 \hat{\mathbf{z}}$	(4c)	V I
$\mathbf{B}_{18}$	$-(x_5 - \frac{1}{2}) \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 + (z_5 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_5 - \frac{1}{2}) \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} + c(z_5 + \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	V I
$\mathbf{B}_{19}$	$-x_5 \mathbf{a}_1 + \frac{3}{4} \mathbf{a}_2 - z_5 \mathbf{a}_3$	$-a x_5 \hat{\mathbf{x}} + \frac{3}{4} b \hat{\mathbf{y}} - c z_5 \hat{\mathbf{z}}$	(4c)	V I
$\mathbf{B}_{20}$	$(x_5 + \frac{1}{2}) \mathbf{a}_1 + \frac{1}{4} \mathbf{a}_2 - (z_5 - \frac{1}{2}) \mathbf{a}_3$	$a(x_5 + \frac{1}{2}) \hat{\mathbf{x}} + \frac{1}{4} b \hat{\mathbf{y}} - c(z_5 - \frac{1}{2}) \hat{\mathbf{z}}$	(4c)	V I
$\mathbf{B}_{21}$	$x_6 \mathbf{a}_1 + y_6 \mathbf{a}_2 + z_6 \mathbf{a}_3$	$a x_6 \hat{\mathbf{x}} + b y_6 \hat{\mathbf{y}} + c z_6 \hat{\mathbf{z}}$	(8d)	O IV
$\mathbf{B}_{22}$	$-(x_6 - \frac{1}{2}) \mathbf{a}_1 - y_6 \mathbf{a}_2 + (z_6 + \frac{1}{2}) \mathbf{a}_3$	$-a(x_6 - \frac{1}{2}) \hat{\mathbf{x}} - b y_6 \hat{\mathbf{y}} + c(z_6 + \frac{1}{2}) \hat{\mathbf{z}}$	(8d)	O IV
$\mathbf{B}_{23}$	$-x_6 \mathbf{a}_1 + (y_6 + \frac{1}{2}) \mathbf{a}_2 - z_6 \mathbf{a}_3$	$-a x_6 \hat{\mathbf{x}} + b(y_6 + \frac{1}{2}) \hat{\mathbf{y}} - c z_6 \hat{\mathbf{z}}$	(8d)	O IV
$\mathbf{B}_{24}$	$(x_6 + \frac{1}{2}) \mathbf{a}_1 - (y_6 - \frac{1}{2}) \mathbf{a}_2 - (z_6 - \frac{1}{2}) \mathbf{a}_3$	$a(x_6 + \frac{1}{2}) \hat{\mathbf{x}} - b(y_6 - \frac{1}{2}) \hat{\mathbf{y}} - c(z_6 - \frac{1}{2}) \hat{\mathbf{z}}$	(8d)	O IV
$\mathbf{B}_{25}$	$-x_6 \mathbf{a}_1 - y_6 \mathbf{a}_2 - z_6 \mathbf{a}_3$	$-a x_6 \hat{\mathbf{x}} - b y_6 \hat{\mathbf{y}} - c z_6 \hat{\mathbf{z}}$	(8d)	O IV

$$\begin{aligned}
 \mathbf{B}_{26} &= \left(x_6 + \frac{1}{2}\right) \mathbf{a}_1 + y_6 \mathbf{a}_2 - \left(z_6 - \frac{1}{2}\right) \mathbf{a}_3 & = & a \left(x_6 + \frac{1}{2}\right) \hat{\mathbf{x}} + b y_6 \hat{\mathbf{y}} - c \left(z_6 - \frac{1}{2}\right) \hat{\mathbf{z}} & (8d) & O \text{ IV} \\
 \mathbf{B}_{27} &= x_6 \mathbf{a}_1 - \left(y_6 - \frac{1}{2}\right) \mathbf{a}_2 + z_6 \mathbf{a}_3 & = & a x_6 \hat{\mathbf{x}} - b \left(y_6 - \frac{1}{2}\right) \hat{\mathbf{y}} + c z_6 \hat{\mathbf{z}} & (8d) & O \text{ IV} \\
 \mathbf{B}_{28} &= -\left(x_6 - \frac{1}{2}\right) \mathbf{a}_1 + \left(y_6 + \frac{1}{2}\right) \mathbf{a}_2 + \left(z_6 + \frac{1}{2}\right) \mathbf{a}_3 & = & -a \left(x_6 - \frac{1}{2}\right) \hat{\mathbf{x}} + b \left(y_6 + \frac{1}{2}\right) \hat{\mathbf{y}} + c \left(z_6 + \frac{1}{2}\right) \hat{\mathbf{z}} & (8d) & O \text{ IV}
 \end{aligned}$$

## References

- [1] P. Kierkegaard, J. M. Longo, and B.-O. Marinder, *Note on the Crystal Structure of VOSO<sub>4</sub>*, Acta Chem. Scand. **19**, 763–764 (1965), doi:10.3891/acta.chem.scand.19-0763.