


Sr₃Ti₂O₇ Structure: A7B3C2_tI24_139_aeg_be_e-001

This structure originally had the label A7B3C2_tI24_139_aeg_be_e. Calls to that address will be redirected here.

Cite this page as: D. Hicks, M. J. Mehl, M. Esters, C. Oses, O. Levy, G. L. W. Hart, C. Toher, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 3*, Comput. Mater. Sci. **199**, 110450 (2021), doi: 10.1016/j.commatsci.2021.110450.

<https://aflow.org/p/PDHZ>

https://aflow.org/p/A7B3C2_tI24_139_aeg_be_e-001

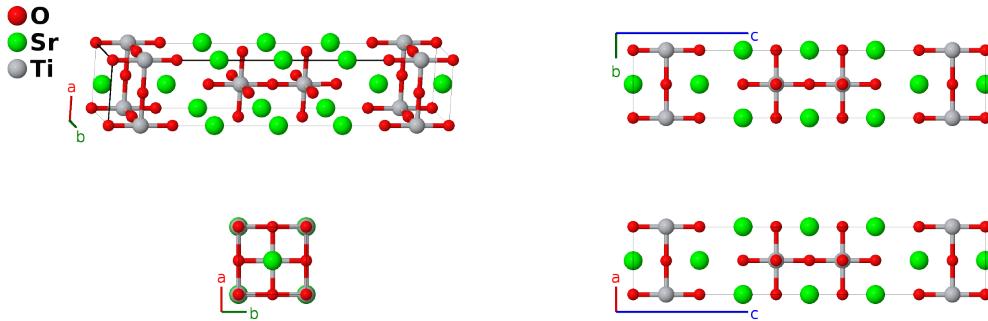

Prototype O₇Sr₃Ti₂

AFLOW prototype label A7B3C2_tI24_139_aeg_be_e-001

ICSD 34629

Pearson symbol tI24

Space group number 139

Space group symbol I4/mmm


AFLOW prototype command `aflow --proto=A7B3C2_tI24_139_aeg_be_e-001
--params=a, c/a, z3, z4, z5, z6`

Other compounds with this structure

Ca₃Ti₂O₇, Sr₃Ru₂O₇, BaLa₂Fe₂O₇, SrTb₂Fe₂O₇

Body-centered Tetragonal primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= -\frac{1}{2}a\hat{\mathbf{x}} + \frac{1}{2}a\hat{\mathbf{y}} + \frac{1}{2}c\hat{\mathbf{z}} \\ \mathbf{a}_2 &= \frac{1}{2}a\hat{\mathbf{x}} - \frac{1}{2}a\hat{\mathbf{y}} + \frac{1}{2}c\hat{\mathbf{z}} \\ \mathbf{a}_3 &= \frac{1}{2}a\hat{\mathbf{x}} + \frac{1}{2}a\hat{\mathbf{y}} - \frac{1}{2}c\hat{\mathbf{z}}\end{aligned}$$



Basis vectors

	Lattice coordinates	Cartesian coordinates	Wyckoff position	Atom type
\mathbf{B}_1	= 0	= 0	(2a)	O I
\mathbf{B}_2	= $\frac{1}{2}\mathbf{a}_1 + \frac{1}{2}\mathbf{a}_2$	= $\frac{1}{2}c\hat{\mathbf{z}}$	(2b)	Sr I

B₃	=	$z_3 \mathbf{a}_1 + z_3 \mathbf{a}_2$	=	$cz_3 \hat{\mathbf{z}}$	(4e)	O II
B₄	=	$-z_3 \mathbf{a}_1 - z_3 \mathbf{a}_2$	=	$-cz_3 \hat{\mathbf{z}}$	(4e)	O II
B₅	=	$z_4 \mathbf{a}_1 + z_4 \mathbf{a}_2$	=	$cz_4 \hat{\mathbf{z}}$	(4e)	Sr II
B₆	=	$-z_4 \mathbf{a}_1 - z_4 \mathbf{a}_2$	=	$-cz_4 \hat{\mathbf{z}}$	(4e)	Sr II
B₇	=	$z_5 \mathbf{a}_1 + z_5 \mathbf{a}_2$	=	$cz_5 \hat{\mathbf{z}}$	(4e)	Ti I
B₈	=	$-z_5 \mathbf{a}_1 - z_5 \mathbf{a}_2$	=	$-cz_5 \hat{\mathbf{z}}$	(4e)	Ti I
B₉	=	$(z_6 + \frac{1}{2}) \mathbf{a}_1 + z_6 \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	=	$\frac{1}{2}a \hat{\mathbf{y}} + cz_6 \hat{\mathbf{z}}$	(8g)	O III
B₁₀	=	$z_6 \mathbf{a}_1 + (z_6 + \frac{1}{2}) \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	=	$\frac{1}{2}a \hat{\mathbf{x}} + cz_6 \hat{\mathbf{z}}$	(8g)	O III
B₁₁	=	$-(z_6 - \frac{1}{2}) \mathbf{a}_1 - z_6 \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	=	$\frac{1}{2}a \hat{\mathbf{y}} - cz_6 \hat{\mathbf{z}}$	(8g)	O III
B₁₂	=	$-z_6 \mathbf{a}_1 - (z_6 - \frac{1}{2}) \mathbf{a}_2 + \frac{1}{2} \mathbf{a}_3$	=	$\frac{1}{2}a \hat{\mathbf{x}} - cz_6 \hat{\mathbf{z}}$	(8g)	O III

References

- [1] S. N. Ruddlesden and P. Popper, *The compound Sr₃Ti₂O₇ and its structure*, Acta Cryst. **11**, 54–55 (1958), doi:10.1107/S0365110X58000128.

Found in

- [1] Wikipedia, *Ruddlesden-Popper phase*. A₃B₂X₇ series.