


# CrSi<sub>2</sub> (*C*40) Structure: AB2\_hP9\_180\_c\_i-001

This structure originally had the label AB2\_hP9\_180\_d\_j. Calls to that address will be redirected here.

Cite this page as: M. J. Mehl, D. Hicks, C. Toher, O. Levy, R. M. Hanson, G. Hart, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 1*, Comput. Mater. Sci. **136**, S1-828 (2017). doi: 10.1016/j.commatsci.2017.01.017

<https://aflow.org/p/3K6M>

[https://aflow.org/p/AB2\\_hP9\\_180\\_c\\_i-001](https://aflow.org/p/AB2_hP9_180_c_i-001)

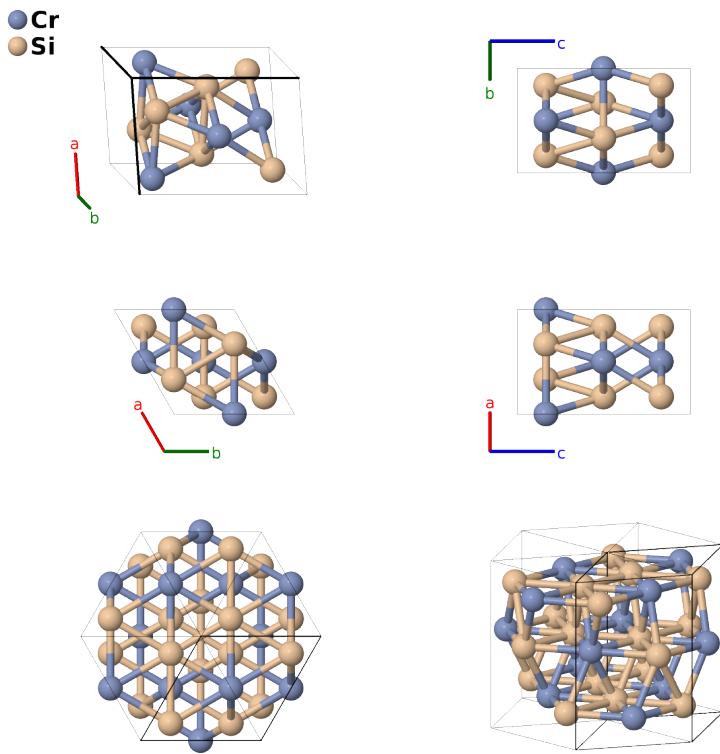

<b>Prototype</b>	CrSi <sub>2</sub>
<b>AFLOW prototype label</b>	AB2_hP9_180_c_i-001
<b>Strukturbericht designation</b>	<i>C</i> 40
<b>ICSD</b>	161434
<b>Pearson symbol</b>	hP9
<b>Space group number</b>	180
<b>Space group symbol</b>	<i>P</i> 6 <sub>2</sub> 22
<b>AFLOW prototype command</b>	<code>aflow --proto=AB2_hP9_180_c_i-001 --params=a, c/a, x<sub>2</sub></code>

---

## Other compounds with this structure


HfSn<sub>2</sub>, MoSi<sub>2</sub>, NbGe<sub>2</sub>, TaGe<sub>2</sub>, TaSi<sub>2</sub>, VGe<sub>2</sub>, VSi<sub>2</sub>, WSi<sub>2</sub>

---

- This compound can also be found in the enantiomorphic space group  $P6_422$  #181.

### Hexagonal primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= \frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}a\hat{\mathbf{y}} \\ \mathbf{a}_2 &= \frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}a\hat{\mathbf{y}} \\ \mathbf{a}_3 &= c\hat{\mathbf{z}}\end{aligned}$$



### Basis vectors

	Lattice coordinates	Cartesian coordinates	Wyckoff position	Atom type
$\mathbf{B}_1$ =	$\frac{1}{2}\mathbf{a}_1$	$\frac{1}{4}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{4}a\hat{\mathbf{y}}$	(3c)	Cr I
$\mathbf{B}_2$ =	$\frac{1}{2}\mathbf{a}_2 + \frac{2}{3}\mathbf{a}_3$	$\frac{1}{4}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{4}a\hat{\mathbf{y}} + \frac{2}{3}c\hat{\mathbf{z}}$	(3c)	Cr I
$\mathbf{B}_3$ =	$\frac{1}{2}\mathbf{a}_1 + \frac{1}{2}\mathbf{a}_2 + \frac{1}{3}\mathbf{a}_3$	$\frac{1}{2}a\hat{\mathbf{x}} + \frac{1}{3}c\hat{\mathbf{z}}$	(3c)	Cr I
$\mathbf{B}_4$ =	$x_2\mathbf{a}_1 + 2x_2\mathbf{a}_2$	$\frac{3}{2}ax_2\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_2\hat{\mathbf{y}}$	(6i)	Si I
$\mathbf{B}_5$ =	$-2x_2\mathbf{a}_1 - x_2\mathbf{a}_2 + \frac{2}{3}\mathbf{a}_3$	$-\frac{3}{2}ax_2\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_2\hat{\mathbf{y}} + \frac{2}{3}c\hat{\mathbf{z}}$	(6i)	Si I
$\mathbf{B}_6$ =	$x_2\mathbf{a}_1 - x_2\mathbf{a}_2 + \frac{1}{3}\mathbf{a}_3$	$-\sqrt{3}ax_2\hat{\mathbf{y}} + \frac{1}{3}c\hat{\mathbf{z}}$	(6i)	Si I
$\mathbf{B}_7$ =	$-x_2\mathbf{a}_1 - 2x_2\mathbf{a}_2$	$-\frac{3}{2}ax_2\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_2\hat{\mathbf{y}}$	(6i)	Si I
$\mathbf{B}_8$ =	$2x_2\mathbf{a}_1 + x_2\mathbf{a}_2 + \frac{2}{3}\mathbf{a}_3$	$\frac{3}{2}ax_2\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_2\hat{\mathbf{y}} + \frac{2}{3}c\hat{\mathbf{z}}$	(6i)	Si I
$\mathbf{B}_9$ =	$-x_2\mathbf{a}_1 + x_2\mathbf{a}_2 + \frac{1}{3}\mathbf{a}_3$	$\sqrt{3}ax_2\hat{\mathbf{y}} + \frac{1}{3}c\hat{\mathbf{z}}$	(6i)	Si I

### References

- [1] T. Dasgupta, J. Etourneau, B. Chevalier, S. F. Matar, and A. M. Umarji, *Structural, thermal, and electrical properties of CrSi<sub>2</sub>*, J. Appl. Phys. **103**, 113516 (2008), doi:10.1063/1.2917347.