


# CrCuS<sub>2</sub> Structure: ABC2\_hR4\_160\_a\_a\_2a-003

Cite this page as: H. Eckert, S. Divilov, A. Zettel, M. J. Mehl, D. Hicks, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 4*. In preparation.

<https://afLOW.org/p/BC9T>

[https://afLOW.org/p/ABC2\\_hR4\\_160\\_a\\_a\\_2a-003](https://afLOW.org/p/ABC2_hR4_160_a_a_2a-003)

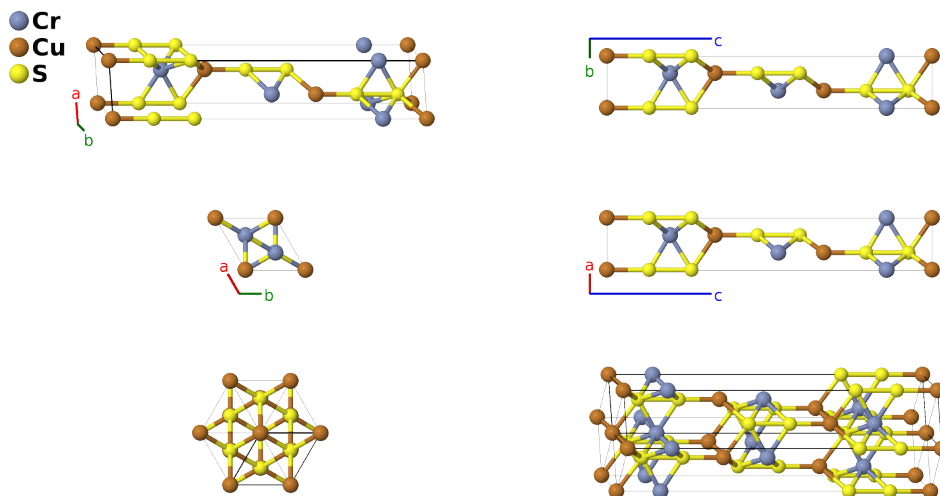

Prototype	CrCuS <sub>2</sub>
AFLOW prototype label	ABC2_hR4_160_a_a_2a-003
ICSD	25627
Pearson symbol	hR4
Space group number	160
Space group symbol	<i>R</i> 3 <i>m</i>
AFLOW prototype command	<code>afLOW --proto=ABC2_hR4_160_a_a_2a-003 --params=a, c/a, x<sub>1</sub>, x<sub>2</sub>, x<sub>3</sub>, x<sub>4</sub></code>

## Other compounds with this structure


AgCuS<sub>2</sub>, AgCuSe<sub>2</sub>, AuCrS<sub>2</sub>, CrCuSe<sub>2</sub>, CrMoN<sub>2</sub>

- Space group *R*3*m* #160 does not specify the origin of the *z*-axis. Here we choose  $z_I = 0$  for the position of the chromium atom.
- $\alpha$ -CrOOH and CrCuS<sub>2</sub> have the AFLOW prototype label, ABC2\_hR4.160.a.a.2a. They are generated by the same symmetry operations with different sets of parameters (`--params`) specified in their corresponding CIF files.
- Hexagonal settings of this structure can be obtained with the option `--hex`.

---

## Rhombohedral primitive vectors

$$\begin{aligned}\mathbf{a}_1 &= \frac{1}{2}a \hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a \hat{\mathbf{y}} + \frac{1}{3}c \hat{\mathbf{z}} \\ \mathbf{a}_2 &= \frac{1}{\sqrt{3}}a \hat{\mathbf{y}} + \frac{1}{3}c \hat{\mathbf{z}} \\ \mathbf{a}_3 &= -\frac{1}{2}a \hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a \hat{\mathbf{y}} + \frac{1}{3}c \hat{\mathbf{z}}\end{aligned}$$



---

## Basis vectors

	Lattice coordinates		Cartesian coordinates	Wyckoff position	Atom type
$\mathbf{B}_1$	$=$	$x_1 \mathbf{a}_1 + x_1 \mathbf{a}_2 + x_1 \mathbf{a}_3$	$=$	$cx_1 \hat{\mathbf{z}}$	(1a) Cr I
$\mathbf{B}_2$	$=$	$x_2 \mathbf{a}_1 + x_2 \mathbf{a}_2 + x_2 \mathbf{a}_3$	$=$	$cx_2 \hat{\mathbf{z}}$	(1a) Cu I
$\mathbf{B}_3$	$=$	$x_3 \mathbf{a}_1 + x_3 \mathbf{a}_2 + x_3 \mathbf{a}_3$	$=$	$cx_3 \hat{\mathbf{z}}$	(1a) S I
$\mathbf{B}_4$	$=$	$x_4 \mathbf{a}_1 + x_4 \mathbf{a}_2 + x_4 \mathbf{a}_3$	$=$	$cx_4 \hat{\mathbf{z}}$	(1a) S II

## References

- [1] H. Hahn and C. de Lorent, *Untersuchungen über ternäre Chalkogenide. XII. Über ternäre Chalkogenide des Chroms mit einwertigem Kupfer und Silber*, Z. Anorganische und Allgemeine Chemie **290**, 68–81 (1957), doi:10.1002/zaac.19572900108.

## Found in

- [1] W. B. Pearson, *A Handbook of Lattice Spacings and Structures of Metals and Alloys, Volume 2, International Series of Monographs on Metal Physics and Physical Metallurgy*, vol. 8 (Pergamon Press, Oxford, London, Edinburgh, New York, Toronto, Sydney, Paris, Braunschweig, 1967).