


Nevskite (BiSe) Structure: AB_hP12_164_c2d_c2d-001

This structure originally had the label AB_hP12_164_c2d_c2d. Calls to that address will be redirected here.

Cite this page as: D. Hicks, M. J. Mehl, M. Esters, C. Oses, O. Levy, G. L. W. Hart, C. Toher, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 3*, Comput. Mater. Sci. **199**, 110450 (2021), doi: 10.1016/j.commatsci.2021.110450.

<https://aflow.org/p/UEMM>

https://aflow.org/p/AB_hP12_164_c2d_c2d-001

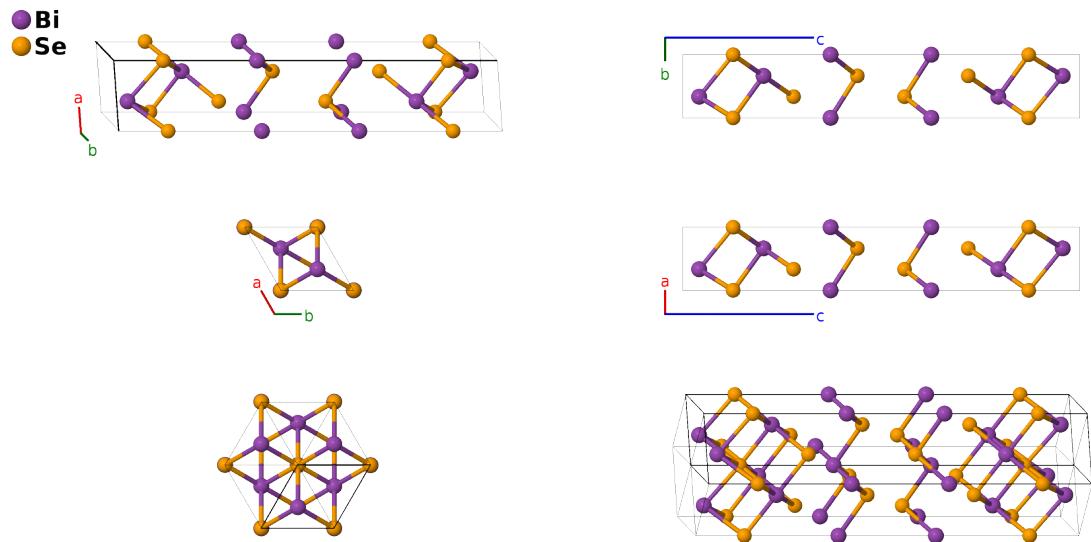


Prototype	BiSe
AFLOW prototype label	AB_hP12_164_c2d_c2d-001
Mineral name	nevskite
ICSD	79019
Pearson symbol	hP12
Space group number	164
Space group symbol	$P\bar{3}m1$
AFLOW prototype command	<code>aflow --proto=AB_hP12_164_c2d_c2d-001 --params=a, c/a, z1, z2, z3, z4, z5, z6</code>

Other compounds with this structure
BiTe (tsumoite), Bi(S_{0.56}Te_{0.44}) (ingodite)

- The site Bi I actually has the composition (Bi_{0.74}Se_{0.26}), while the site Se II is actually (Se_{0.72},Bi_{0.28}).

Trigonal (Hexagonal) primitive vectors

$$\begin{aligned}
\mathbf{a}_1 &= \frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}a\hat{\mathbf{y}} \\
\mathbf{a}_2 &= \frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}a\hat{\mathbf{y}} \\
\mathbf{a}_3 &= c\hat{\mathbf{z}}
\end{aligned}$$

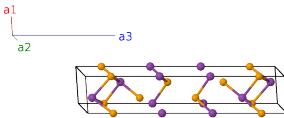

Basis vectors

	Lattice coordinates	=	Cartesian coordinates	Wyckoff position	Atom type
\mathbf{B}_1	$z_1 \mathbf{a}_3$	=	$cz_1 \hat{\mathbf{z}}$	(2c)	Bi I
\mathbf{B}_2	$-z_1 \mathbf{a}_3$	=	$-cz_1 \hat{\mathbf{z}}$	(2c)	Bi I
\mathbf{B}_3	$z_2 \mathbf{a}_3$	=	$cz_2 \hat{\mathbf{z}}$	(2c)	Se I
\mathbf{B}_4	$-z_2 \mathbf{a}_3$	=	$-cz_2 \hat{\mathbf{z}}$	(2c)	Se I
\mathbf{B}_5	$\frac{1}{3}\mathbf{a}_1 + \frac{2}{3}\mathbf{a}_2 + z_3 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} + cz_3 \hat{\mathbf{z}}$	(2d)	Bi II
\mathbf{B}_6	$\frac{2}{3}\mathbf{a}_1 + \frac{1}{3}\mathbf{a}_2 - z_3 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} - cz_3 \hat{\mathbf{z}}$	(2d)	Bi II
\mathbf{B}_7	$\frac{1}{3}\mathbf{a}_1 + \frac{2}{3}\mathbf{a}_2 + z_4 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} + cz_4 \hat{\mathbf{z}}$	(2d)	Bi III
\mathbf{B}_8	$\frac{2}{3}\mathbf{a}_1 + \frac{1}{3}\mathbf{a}_2 - z_4 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} - cz_4 \hat{\mathbf{z}}$	(2d)	Bi III
\mathbf{B}_9	$\frac{1}{3}\mathbf{a}_1 + \frac{2}{3}\mathbf{a}_2 + z_5 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} + cz_5 \hat{\mathbf{z}}$	(2d)	Se II
\mathbf{B}_{10}	$\frac{2}{3}\mathbf{a}_1 + \frac{1}{3}\mathbf{a}_2 - z_5 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} - cz_5 \hat{\mathbf{z}}$	(2d)	Se II
\mathbf{B}_{11}	$\frac{1}{3}\mathbf{a}_1 + \frac{2}{3}\mathbf{a}_2 + z_6 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} + cz_6 \hat{\mathbf{z}}$	(2d)	Se III
\mathbf{B}_{12}	$\frac{2}{3}\mathbf{a}_1 + \frac{1}{3}\mathbf{a}_2 - z_6 \mathbf{a}_3$	=	$\frac{1}{2}a\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\hat{\mathbf{y}} - cz_6 \hat{\mathbf{z}}$	(2d)	Se III

References

- [1] E. Gaudin, S. Jobic, M. Evain, R. Brec, and J. Rouxel, *Charge balance in some Bi_xSe_y phases through atomic structure determination and band structure calculations*, Mater. Res. Bull. **30**, 549–561 (1995), doi:10.1016/0025-5408(95)00030-5.

Found in

- [1] K. Majhi, K. Pal, H. Lohani, A. Banerjee, P. Mishra, A. K. Y. R. Ganesan, B. R. Sekhar, U. V. Waghmare, and P. S. A. Kumar, *Emergence of a weak topological insulator from the Bi_xSe_y family*, Appl. Phys. Lett. **110**, 162102 (2017), doi:10.1063/1.4981875.