Ti_5Ga_4 Structure: A4B5_hP18_193_bg_dg-001

This structure originally had the label `A4B5_hP18_193_bg_dg`. Calls to that address will be redirected here.

Cite this page as: D. Hicks, M. J. Mehl, M. Esters, C. Oses, O. Levy, G. L. W. Hart, C. Toher, and S. Curtarolo, *The AFLOW Library of Crystallographic Prototypes: Part 3*, Comput. Mater. Sci. **199**, 110450 (2021), doi: 10.1016/j.commatsci.2021.110450.

---

https://aflow.org/p/443S

https://aflow.org/p/A4B5_hP18_193_bg_dg-001

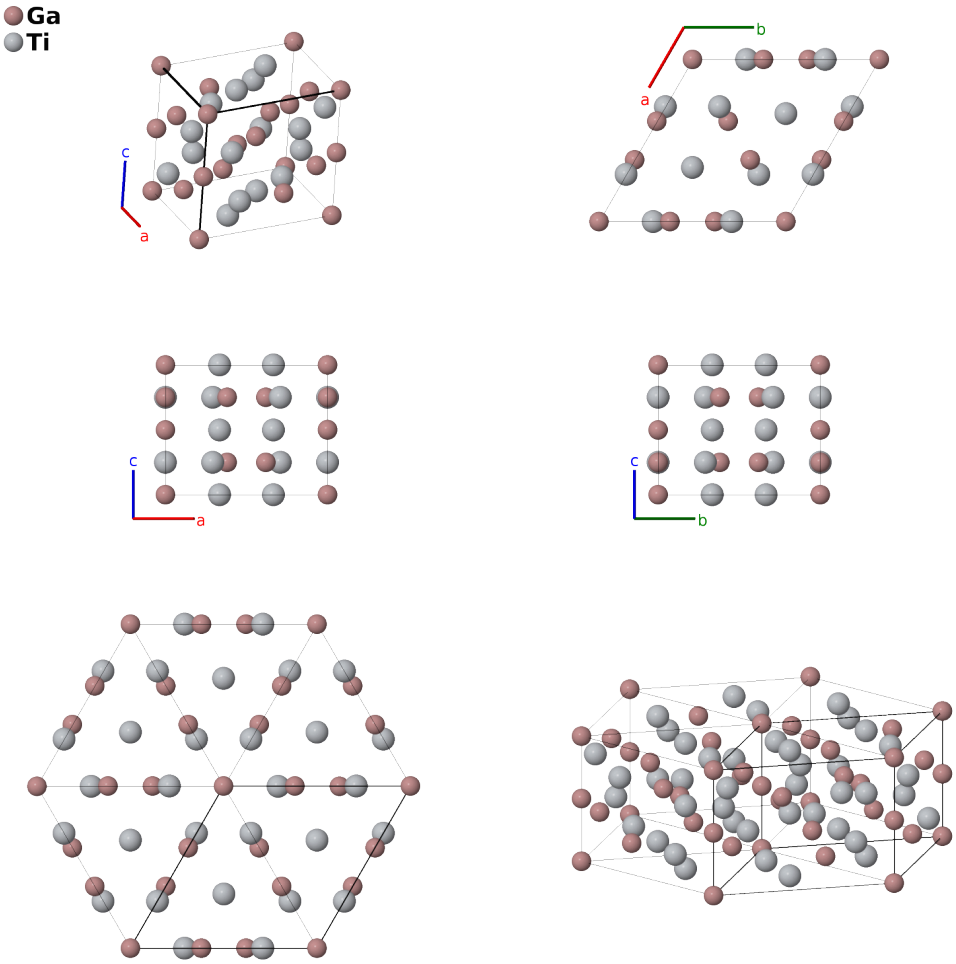

Prototype	Ga_4Ti_5
AFLOW prototype label	A4B5_hP18_193_bg_dg-001
ICSD	103997
Pearson symbol	hP18
Space group number	193
Space group symbol	$P6_3/mcm$
AFLOW prototype command	`aflow --proto=A4B5_hP18_193_bg_dg-001 --params=`$a, c/a, x_3, x_4$

Other compounds with this structure
Th_5Sn_4, Zr_5Al_4, Zr_5Ga_4, Hf_5Sn_4, Ba_3TlTe_5, NbIrO, Ce_3TiSb_5, Ce_3TiBi_5

- This is the $D8_8$ structure with the addition of two atoms on the (2b) site.

Hexagonal primitive vectors

$$\begin{aligned}\mathbf{a_1} &= \tfrac{1}{2}a\,\hat{\mathbf{x}} - \tfrac{\sqrt{3}}{2}a\,\hat{\mathbf{y}}\\ \mathbf{a_2} &= \tfrac{1}{2}a\,\hat{\mathbf{x}} + \tfrac{\sqrt{3}}{2}a\,\hat{\mathbf{y}}\\ \mathbf{a_3} &= c\,\hat{\mathbf{z}}\end{aligned}$$



Basis vectors

		Lattice coordinates		Cartesian coordinates	Wyckoff position	Atom type
$\mathbf{B_1}$	=	0	=	0	(2b)	Ga I
$\mathbf{B_2}$	=	$\frac{1}{2}\,\mathbf{a}_3$	=	$\frac{1}{2}c\,\hat{\mathbf{z}}$	(2b)	Ga I
$\mathbf{B_3}$	=	$\frac{1}{3}\,\mathbf{a}_1 + \frac{2}{3}\,\mathbf{a}_2$	=	$\frac{1}{2}a\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\,\hat{\mathbf{y}}$	(4d)	Ti I
$\mathbf{B_4}$	=	$\frac{2}{3}\,\mathbf{a}_1 + \frac{1}{3}\,\mathbf{a}_2 + \frac{1}{2}\,\mathbf{a}_3$	=	$\frac{1}{2}a\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\,\hat{\mathbf{y}} + \frac{1}{2}c\,\hat{\mathbf{z}}$	(4d)	Ti I
$\mathbf{B_5}$	=	$\frac{2}{3}\,\mathbf{a}_1 + \frac{1}{3}\,\mathbf{a}_2$	=	$\frac{1}{2}a\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{6}a\,\hat{\mathbf{y}}$	(4d)	Ti I
$\mathbf{B_6}$	=	$\frac{1}{3}\,\mathbf{a}_1 + \frac{2}{3}\,\mathbf{a}_2 + \frac{1}{2}\,\mathbf{a}_3$	=	$\frac{1}{2}a\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{6}a\,\hat{\mathbf{y}} + \frac{1}{2}c\,\hat{\mathbf{z}}$	(4d)	Ti I
$\mathbf{B_7}$	=	$x_3\,\mathbf{a}_1 + \frac{1}{4}\,\mathbf{a}_3$	=	$\frac{1}{2}ax_3\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_3\,\hat{\mathbf{y}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_8}$	=	$x_3\,\mathbf{a}_2 + \frac{1}{4}\,\mathbf{a}_3$	=	$\frac{1}{2}ax_3\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_3\,\hat{\mathbf{y}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_9}$	=	$-x_3\,\mathbf{a}_1 - x_3\,\mathbf{a}_2 + \frac{1}{4}\,\mathbf{a}_3$	=	$-ax_3\,\hat{\mathbf{x}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_{10}}$	=	$-x_3\,\mathbf{a}_1 + \frac{3}{4}\,\mathbf{a}_3$	=	$-\frac{1}{2}ax_3\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_3\,\hat{\mathbf{y}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_{11}}$	=	$-x_3\,\mathbf{a}_2 + \frac{3}{4}\,\mathbf{a}_3$	=	$-\frac{1}{2}ax_3\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_3\,\hat{\mathbf{y}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_{12}}$	=	$x_3\,\mathbf{a}_1 + x_3\,\mathbf{a}_2 + \frac{3}{4}\,\mathbf{a}_3$	=	$ax_3\,\hat{\mathbf{x}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ga II
$\mathbf{B_{13}}$	=	$x_4\,\mathbf{a}_1 + \frac{1}{4}\,\mathbf{a}_3$	=	$\frac{1}{2}ax_4\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_4\,\hat{\mathbf{y}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II
$\mathbf{B_{14}}$	=	$x_4\,\mathbf{a}_2 + \frac{1}{4}\,\mathbf{a}_3$	=	$\frac{1}{2}ax_4\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_4\,\hat{\mathbf{y}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II
$\mathbf{B_{15}}$	=	$-x_4\,\mathbf{a}_1 - x_4\,\mathbf{a}_2 + \frac{1}{4}\,\mathbf{a}_3$	=	$-ax_4\,\hat{\mathbf{x}} + \frac{1}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II
$\mathbf{B_{16}}$	=	$-x_4\,\mathbf{a}_1 + \frac{3}{4}\,\mathbf{a}_3$	=	$-\frac{1}{2}ax_4\,\hat{\mathbf{x}} + \frac{\sqrt{3}}{2}ax_4\,\hat{\mathbf{y}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II
$\mathbf{B_{17}}$	=	$-x_4\,\mathbf{a}_2 + \frac{3}{4}\,\mathbf{a}_3$	=	$-\frac{1}{2}ax_4\,\hat{\mathbf{x}} - \frac{\sqrt{3}}{2}ax_4\,\hat{\mathbf{y}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II
$\mathbf{B_{18}}$	=	$x_4\,\mathbf{a}_1 + x_4\,\mathbf{a}_2 + \frac{3}{4}\,\mathbf{a}_3$	=	$ax_4\,\hat{\mathbf{x}} + \frac{3}{4}c\,\hat{\mathbf{z}}$	(6g)	Ti II

References

[1] K. Schubert, H. G. Meissner, M. Pötzschke, W. Rossteutscher, and E. Stolz, *Einige Strukturdaten metallischer Phasen (7)*, Naturwissenschaften **49**, 57 (1962), doi:10.1007/BF00595382.

Found in

[1] P. Villars, *Ti5Ga4 Crystal Structure* (2016). PAULING FILE in: Inorganic Solid Phases, SpringerMaterials (online database), Springer, Heidelberg (ed.) SpringerMaterials.